

**VCA Headquarters**

1 The Eastgate Office Centre  
Eastgate Road  
Bristol, BS5 6XX  
United Kingdom

Switchboard: +44 (0) 117 951 5151  
Direct line: +44 (0) 117 952  
Main Fax: +44 (0) 117 952 4103  
Email: [enquiries@vca.gov.uk](mailto:enquiries@vca.gov.uk)  
Web: [www.vca.gov.uk](http://www.vca.gov.uk)

Your Reference:

Date: 08 JANUARY 2008

Dear

**MANUFACTURER OR ACCREDITED AGENT: Dongfeng Cummins Engine Company, Ltd.**

**ECE REGULATION/EEC DIRECTIVE: 24.03**

Job No.	Vehicle Type/Component	Approval No.	Index Rev. No.
CSH184915	Engine: ISLe340 30	24R-032135	

1. This vehicle type/component has been tested and meets the requirements of the above ECE Regulation/EEC Directive. I enclose a set of approval documents, comprising the approval, test report and your documentation duly authenticated.

2. If you think there are any errors in the enclosed package, please contact Andrew Meadows, telephone 0117 952 4187, e-mail [andrew.meadows@vca.gov.uk](mailto:andrew.meadows@vca.gov.uk) Patricia Britton, telephone 0117 952 4171, e-mail [pat.britton@vca.gov.uk](mailto:pat.britton@vca.gov.uk) immediately. Please be aware that from the date of issue we have a three week holding period, any corrections required after this time will need to be corrected via an extension, index revision or correction 1 certificate, as appropriate.

**ROAD TRAFFIC ACT 1988 - SECTION 80**

3. The Secretary of State for Transport authorises, under section 80 of the Road Traffic Act 1988, the above manufacturer or accredited agent to apply to the motor vehicle type/part specified, the appropriate mark designated in the Motor Vehicles (Designation of Approval Marks) Regulations 1979, as amended. The conditions attached to this authorisation are set out overleaf.

4. If this approval/extension results in a change being needed to a vehicle information document issued under the goods vehicle or passenger car national type approval scheme, you should notify us (i.e. submit a 'notifiable alteration') as soon as possible, using the address VCA (Whole Vehicle), Room 1.2, The Eastgate Office Centre, Eastgate Road, Bristol BS5 6XX.

5. VCA is continually scrutinising the quality of the service it provides to customers, in order to discover more ways in which the standard can be improved. If you have a specific complaint concerning the way this job has been dealt with, our customer services leaflet gives guidance on the best approach. If you would like a copy, please contact the undersigned.

Yours sincerely

Product Certification



INVESTOR IN PEOPLE



VCA Midlands Centre  
Nuneaton, Warwickshire, UK  
Switchboard: +44 (0)247 632 8421  
Fax: +44 (0)247 632 9276  
Email: [enquiries@vca.gov.uk](mailto:enquiries@vca.gov.uk)

VCA Millbrook Centre  
Millbrook, Bedford, UK  
Telephone: +44 (0)1525 408466  
Email: [millbrook@vca.gov.uk](mailto:millbrook@vca.gov.uk)

VCA North America  
Northville, Michigan, USA  
Switchboard: +1 248 4680151  
Main Fax: +1 248 3499261  
Email: [general@vcana.com](mailto:general@vcana.com)  
Web: [www.vcana.com](http://www.vcana.com)

Ohio office  
Ashland, Ohio, USA  
Telephone: +1 419 207 8123  
Fax: +1 419 207 1193  
Email: [c.gepper@vcana.com](mailto:c.gepper@vcana.com)  
Web: [www.vcana.com](http://www.vcana.com)

VCA East Asia  
Naka-ku, Nagoya, Japan  
Telephone: +81 52 683 8831  
Fax from Europe: +44 (0) 870 125 3704  
Fax from East Asia: +81 (0) 6 7500 1280  
Email: [enquiries@vca-asia.jp](mailto:enquiries@vca-asia.jp)  
Web: [www.vca-asia.net](http://www.vca-asia.net)

VCA Malaysia  
Selangor, Malaysia  
Telephone: +6 037 494 0221  
or +6 037 494 4868  
Fax: +6 037 494 0225  
Email: [paultownd.vca@myjaring.net](mailto:paultownd.vca@myjaring.net)

VCA China  
Beijing  
Telephone: +8610 852 83091/2/3  
Fax: +8610 852 830 97



## 1. CONDITIONS

1.1 This Approval may be withdrawn at any time and while held is subject to the following conditions.

### 2. CONDITIONS OF MOTOR VEHICLE PARTS

2.1 The holder of this approval shall put the approval mark described in the Motor Vehicles (Designation of Approval Marks) Regulations 1979 as amended only on Motor Vehicle Parts that:

- a. Have been manufactured, assembled or completed in factories under his control and
- b. Conform in all material respects with the samples, which were tested before this approval was issued.

2.2 The holder of this approval shall mark his products in the manner set out in the relevant Regulation/Directive as given in the Motor Vehicles (Designation of Approval Marks) Regulations 1979 as amended together with:

- a. The approval number allocated by the Secretary of State for Transport.
- b. His name or trademark
- c. Any other markings specified in the appropriate international Regulation

2.3 The holder of this approval shall be prepared at any time to satisfy Department for Transport officials or agents of the Department, that the quality of the part being produced and marked or intended to be by him with the approval marking conforms in all material respects with that of the samples tested as the International Regulation requires.

2.4 The holder of this approval undertakes to admit duly authorised officials or agents of the Department at all reasonable times to any premises in which parts marked or intended to be marked are being manufactured, assembled or stored and to permit any such official or agent to inspect parts and all records relating to them and their production processes.

2.5 This approval may be suspended or withdrawn by the Secretary of State for Transport at any time without any particular length of notice being given and in the event of that being done the holder will absolve the Secretary of State from any claim for damages or compensation.

## 3. CONDITIONS FOR MOTOR VEHICLES

3.1 The holder of this approval shall put the approval mark described in the Motor Vehicles (Designation of Approval Marks) Regulation 1979 as amended only on Motor Vehicles fitted with Motor Vehicle parts which Motor Vehicles as fitted with such parts conform with the type of Motor Vehicle approved by as on behalf of the Secretary of State for Transport and only on Motor Vehicles that:

- a. Have been manufactured, assembled or completed in factories under his control and
- b. Conform in all material respects with the type of Motor Vehicle, which was tested before an approval certificate was issued.

3.2 The holder of this approval shall mark motor vehicles of the type approved. In the matter set out in the relevant Regulation/Directive using the authorised approval mark as given in the Motor Vehicles (Designation of Approval Marks) Regulation 1979 as amended together with the approval number allocated by the Secretary of State for Transport.

3.3 The holder of this approval shall mark Motor Vehicles of the type approved in the manner set out in the relevant Regulation annexed to the United Nations agreement of 1958 as amended using the authorised approval mark which comprises a capital letter E followed by the number 11 within a circle together with the approval number allocated by the Secretary of State for Transport.

3.4 The holder of this approval shall be prepared at any time to satisfy Department for Transport officials or agents of the Department that Motor Vehicles of the type approved which have been produced and marked or that are intended to be marked by him conform in all material respects with the type of vehicle approved.

3.5 The holder of this approval undertakes to admit duly authorised officials or agents of the Department at all reasonable times to any premises in which the Motor Vehicles of the type approved which have been or are intended to be marked are manufactured, assembled or stored and to permit any such official or agent to inspect the Motor Vehicles and all records relating to them and their production processes.

3.6 This approval may be suspended or withdrawn by the Secretary of State for Transport at any time without any particular length of notice given and in the event of that being done the holder will absolve the Secretary of State from any claim for damages or compensation.



**VCA Headquarters**  
1 The Eastgate Office Centre  
Eastgate Road  
Bristol, BS5 6XX  
United Kingdom

Switchboard: +44 (0) 117 951 5151  
Main Fax: +44 (0) 117 952 4103  
Email: [enquiries@vca.gov.uk](mailto:enquiries@vca.gov.uk)  
Web: [www.vca.gov.uk](http://www.vca.gov.uk)

THE UNITED KINGDOM VEHICLE APPROVAL AUTHORITY

1/03



COMMUNICATION CONCERNING APPROVAL GRANTED OF A ENGINE TYPE WITH REGARD TO EMISSIONS OR MEASUREMENT OF POWER OF THE ENGINE ONLY, PURSUANT TO REGULATION NO 24.03

Approval No: 24R-032135

Extension No.:00

1. Trade name or mark of vehicle: N/A
2. Trade name or mark of engine: Dongfeng Cummins
3. Vehicle type: N/A
4. Engine type: ISLe340 30      Engine Approval No: N/A
5. Manufacturer's name and address:  
Dongfeng Cummins Engine Company, Ltd.  
High and New Technology Industry Development Zone,  
Xiangfan, HuBei Province,  
People Republic of China 441004
6. If applicable, name and address of manufacturer's representative: N/A
7. Engine submitted for Type Approval on: 10 October 2007
8. Technical service conducting Approval tests: Vehicle Certification Agency
9. Date of report issued by that service: 27 December 2007
10. Number of report issued by that service: CSH184915



## 11. Test results:

## 11.1 Emissions

## 11.1.1 Tests at steady speeds:

Measurement points	Engine Speed n (rpm)	Power P (kW)	Nominal flow G (litres/sec)	Measured absorption values ( $m^{-1}$ )
1	2100	249.82	154.86	0.01
2	1900	241.94	140.11	0.02
3	1700	231.07	125.36	0.02
4	1500	219.91	110.61	0.02
5	1300	201.07	95.86	0.02
6	1000	145.04	73.74	0.02

For engine type approval, power absorbed by the fan during the tests: Fan and alternator no fitted

## 11.1.2 Free acceleration tests

## 11.1.2.1 Engine test in accordance with Annex 5 (1)

Not Applicable

Percentage of maximum rpm <sup>(2)</sup>	Percentage of maximum torque at rpm stated <sup>(2)</sup>	Measured absorption value $m^{-1}$	Corrected absorption value $m^{-1}$
100	100		
90	100		
100	90		
90	90		
100	80		
90	80		

<sup>(2)</sup> The lower limit may be that stated by the manufacturer in accordance with this Regulation, part I, paragraph 6.3.4

11.1.2.2 Engine test according to this Regulation, part I, or vehicle test according to part III <sup>(1)</sup>: Corrected absorption value  $0.77 m^{-1}$ , Inertia mass  $1.0 kg.m^2$ .

Rpm at start: 600 rpm

11.2 Stated net maximum power <sup>(1)</sup>: 243 kW at 2100 rpm

## 12. Make and type of opacimeter: AVL 4390 G004



13. Principal characteristics of engine type:  
Engine working principle: Four stroke  
Number and layout of cylinders: 6 in-line (1-5-3-6-2-4)  
Cylinder capacity: 8849 cm<sup>3</sup>  
Fuel feed: Direct Injection  
Supercharging equipment: YES


14. Approval GRANTED

15. Reason(s) for extension of approval: Not applicable

16. Place: BRISTOL

17. Date: 08 JANUARY 2008

18. Signature:



A W STENNING  
Head of Product Certification

19. A list of the documents contained in the approval file transmitted to the administrative service which has granted approval is annexed to this communication.

CSH184915





# Dongfeng Cummins Engine Company, Ltd.

XIANGFAN, HUBEI

DIESEL ENGINE TEST  
TO  
ECE REGULATION 24.03

Engine model (s): ISLe340 30

Max. 243 kW net at 2100 min<sup>-1</sup>  
(Rated 250 kW gross at 2100 min<sup>-1</sup>)

Test agency.....VCA  
Job Number..... CSH184915  
Date and location of test..... 10/17/2007, NAST, CHINA





Dongfeng Cummins Engine  
Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

## INFORMATION DOCUMENT INDEX

R24.03 Annex 1	Pages 1 to 7
Combustion chamber and piston crown	Attachment 1
Additional anti-smoke device	Attachment 2
Boost control characteristics curve	Attachment 3
Declared engine performance	Attachment 4
Picture/drawing of engine	Attachment 5
Fan power absorption	Attachment 6
Alternator power absorbed	Attachment 7
Air Intake System	Attachment 8
E-Mark	Attachment 9



Dongfeng Cummins Engine  
Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

(E/ECE/324 E/ECE/TRANS/505 Rev 1/Add 23/Rev2 April 25, 1986)

**REGULATION NO 24.03**

**ANNEX 1**

**ESSENTIAL CHARACTERISTICS OF THE VEHICLE AND THE C.I. ENGINE AND  
INFORMATION CONCERNING THE CONDUCT OF TESTS**

**0 DESCRIPTION OF VEHICLE**

0.1	Make:	Not applicable (N/A)
0.2	Type:	N/A
0.3	Name and address of manufacturer:	N/A
0.4	Engine type and approval No.:	ISLe340 30

**1 DESCRIPTION OF ENGINE**

1.1	Make:	Dongfeng Cummins
1.2	Trade mark:	
1.3	Name and address of manufacturer:	Dongfeng Cummins Engine Company Ltd Automobile Industry Development Zone Xiangfan.Hubei Province.China 441004
1.4	Type:	ISLe340 30
1.5	Cycle:	four stroke / <del>two stroke</del> / <del>others</del>
1.6	Bore:	114 mm
1.7	Stroke:	144.5 mm
1.8	Cylinder capacity:	8,849 cm <sup>3</sup>
1.9	Number and layout of cylinders and firing order:	6 in-line (1-5-3-6-2-4)
1.10	Combustion system: description	Direct injection
1.11	Drawing(s) of combustion chamber and piston crown:	See Attachment 1
1.12	Compression ratio:	16.6:1 ± 0.5:1

1.13	Minimum cross-section area of inlet and outlet ports:	INLET OUTLET	333 mm <sup>2</sup> 642 mm <sup>2</sup>
------	---	-----------------	--







<b>2</b>	<b>COOLING SYSTEM:</b>	Liquid / <del>air-cooling</del>
<b>2.1</b>	<b>Characteristics of liquid-cooling system</b>	
2.1.1	Nature of liquid:	Water
2.1.2	Circulating pump(s): description or make(s) and type(s)	Cummins centrifugal
2.1.3	Radiator/fan system: description	Test cell system Fan not fitted on test – See Attachment 6
2.1.4	Drive ratio(s):	N/A
2.1.5	Max. temperature at outlet:	373 K
<b>2.2</b>	<b>Characteristics of air-cooling system</b>	
2.2.1	Blower system: characteristics or make(s) and type(s)	N/A
2.2.2	Drive ratio(s):	N/A
2.2.3	Temperature regulating system: Yes/no	N/A
2.2.4	Air ducting: description	N/A
2.2.5	Max. temperature at a characteristic place:	N/A
<b>3</b>	<b>AIR INTAKE SYSTEM AND FUEL FEED</b>	
3.1.1	Description and drawings of air intake system and its accessories (heating device, intake silencers, air filter, etc) or make(s) and type(s) if the test is made with complete system as supplied by the vehicle manufacturer, in a vehicle or on a test bench:	See Attachment 9
3.1.2	Maximum permitted depression of air intake at a characteristic place (specify location of measurement):	3.73 kPa at inlet to compressor
<b>3.2</b>	<b>Pressure charger:</b>	yes / <del>no</del>
3.2.1	Description of the pressure charger system:	- see page 7
3.2.2	Characteristics or make(s) and type(s):	- see page 7
3.2.3	Max. temperature of the air at the outlet of the intake intercooler:	348 K
<b>3.3</b>	<b>Injection system</b>	
3.3.1	<i>Low pressure section</i>	



3.3.1.1	Fuel feed		
3.3.1.2	Characteristic pressure or make(s) and type(s):	Variable pressure / Cummins	
3.3.2	<i>High pressure section</i>		
3.3.2.1	Description of the injection system:	- see page 7	
3.3.2.1.1	Pump: description or make(s) and type(s)	- see page 7	
3.3.2.1.2	Delivery:	167 ± 5 mm <sup>3</sup> per stroke at engine speed of: 2100 min <sup>-1</sup> at full injection	
	Mention the method used:	On engine / <del>on pump bench</del>	
	If boost control is supplied, state the characteristic fuel delivery and boost pressure versus engine speed:	See Attachment 3	
3.3.2.1.3	Static injection timing:	N/A	
3.3.2.1.4	Automatic injection advance range:	Electronic	
3.3.3	<i>Injection piping</i>	<b><u>Pump-rail</u></b>	<b><u>Rail-injector</u></b>
3.3.3.1	Length:	394 ± 2 mm	217 ± 2 mm
3.3.3.2	Internal diameter:	3 mm	3 mm
3.3.4	<i>Injector(s)</i>		
3.3.4.1	Make(s):	- see page 7	
3.3.4.2	Type(s):	- see page 7	
3.3.4.3	Opening pressure:	N/A, <del>or characteristic diagram</del>	
3.3.5	<i>Governor</i>		
3.3.5.1	Description of the governor system or make(s) and type(s):	Cummins Electronic (Automotive/VS)	
3.3.5.2	Speed at which cut-off starts under full load:	2130 ± 20 min <sup>-1</sup>	
3.3.5.3	Maximum no-load speed:	2330 min <sup>-1</sup>	
3.3.5.4	Idling speed:	600 - 800 min <sup>-1</sup> (nominal 700 min <sup>-1</sup> )	

**E 3.4 Cold Start System**

Description or make(s) and type(s): Cummins Electrical Grid Heater

**E 3.5 Additional anti-smoke devices (if any, and if not covered by another heading):**

Air/fuel ratio (AFC) control





See Attachment 2

**4 VALVE TIMING**

4.1 Maximum lift of valves and angles of opening and closing in relation to dead centres (nominal values):  
 INTAKE / INLET: 11.8 mm lift, open 14.2° BTDC, close 47.1° ABDC  
 EXHAUST / OUTLET: 12.1 mm lift, open 51.8° BBDC, close 19.6° ATDC

**5 EXHAUST SYSTEM**

5.1 Description of exhaust equipment if the test is made with the complete equipment provided by the engine or vehicle manufacturer: N/A

Specify the back pressure at maximum net power and the location of measurement: N/A

Indicate the effective volume of the exhaust: N/A

5.2 If the test bench equipment is used, specify the back pressure at maximum net power and the location of measurement: 10.1 kPa at turbine outlet

Indicate the effective volume of the exhaust: 65,200 cm<sup>3</sup> (test cell system)

**6 LUBRICATION SYSTEM**

6.1 Description of system

6.2 Circulating pump: yes / ~~no~~

Description or make(s) and type(s): Cummins gear type

6.3 Oil cooler: yes / ~~no~~

Description or make(s) and type(s): Cummins water cooled, plate type

6.4 Mixture with fuel: ~~yes~~ / no

Lubrication oil/fuel ratio: N/A

**7 OTHER ENGINE DRIVEN AUXILIARIES**

7.1 Auxiliaries necessary for an operation of the engine on test bench, other than the fan. State characteristics, or make(s) and type(s): None

7.1.1 Generator/alternator: yes / ~~no~~  
Not fitted on test –  
See Attachment 7

7.1.2 Other:





**Dongfeng Cummins Engine Company, Ltd.**

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

**E 7.2 Additional auxiliaries in operation when test is conducted in a vehicle.** State characteristics, or make(s) and type(s): N/A

**E 7.3 Transmission**

State moment of inertia of combined flywheel and transmission ay condition when no gear is engaged, or description, make(s) and type(s) (for torque converter):

1. 1.0 kg.m<sup>2</sup>

**8 ENGINE PERFORMANCE** (declared by the manufacturer)

8.1 Idling speed: 600 - 800 min<sup>-1</sup> (nominal 700 min<sup>-1</sup>)

8.2 Maximum rated speed: 2100 min<sup>-1</sup>

8.3 Minimum rated speed: 1000 min<sup>-1</sup>

8.4 Max. net torque of engine on bench: 1415 Nm at 1300 min<sup>-1</sup>  
(1425 Nm gross at 1100-1400 min<sup>-1</sup>)

8.5 Max. net power of engine on bench: 243 kW at 2100 min<sup>-1</sup>  
(250 kW gross at 2100 min<sup>-1</sup>)

Indicate power absorbed by fan: 4.5 kW at 2100 min<sup>-1</sup> (see Attachment 6)

8.5.1 *Test on Bench*

Declared powers at the points of measurement referred to in Annex 4, Paragraph 2.2 shall be stated in Table 1.

**Table 1: Declared speeds and powers of the engine / vehicle submitted for approval**

(Speeds to be agreed with the test authority)

Measurement point	Engine speed:n (min <sup>-1</sup> )	Power: p kW
1	1000	<b>140.7</b>
2	1100	<b>137.2</b>
3	1500	<b>214.9</b>
4	1700	<b>227.8</b>
5	1900	<b>237.3</b>
peak torque	1300	<b>196.2</b>
peak power	2100	<b>244.3</b>





**PERFORMANCE PARTS LIST**  
**(Pressure charger, fuel pump, injectors)**

**3.2 Pressure charger:**

- 3.2.1 Description of the pressure charger system: wastegate turbocharger
- 3.2.2 Characteristics or make(s) and type(s): Holset HX40W

**3.3 Injection system**

*3.3.2 High pressure section*

3.3.2.1 Description of the injection system:

- 3.3.2.1.1 Pump: description or make(s) and type(s) Cummins CCR1600

*3.3.4 Injector(s)*

- 3.3.4.1 Make(s): Bosch
- 3.3.4.2 Type(s): 0 445




Dongfeng Cummins Engine  
Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

## ANNEX 1: ATTACHMENTS

### ATTACHMENT 1: Combustion Chamber and Piston Crown

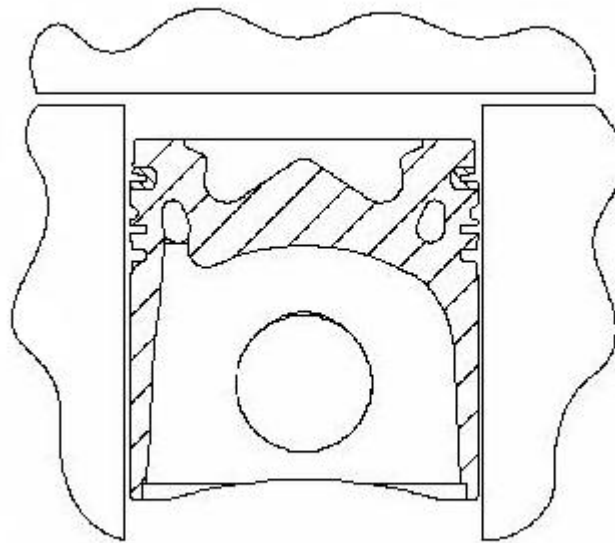



Dongfeng Cummins Engine  
Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

## ANNEX 1: ATTACHMENTS

### ATTACHMENT 2: Additional Anti-Smoke Device

Air/fuel ratio control (AFC) is an electronic table incorporated in the Cummins software stored in the electronic control module, designed to regulate the fuel delivery output to correspond with the inlet manifold pressure on turbocharged engines during acceleration and lugging.

When a turbocharged engine is accelerated, there is sometimes a delay between the throttle arriving at full fuel position, and the turbocharger providing boost pressure to the combustion chamber. Consequently there is not sufficient air to completely burn the fuel, resulting in excessive smoke during this operation.

The AFC algorithm – in conjunction with engine sensors, will determine the air pressure in the intake manifold during this period and adjust the fuel pressure to limit the amount of fuel injected, thus reducing the smoke produced.






Dongfeng Cummins Engine Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

### ANNEX 1: ATTACHMENTS

#### ATTACHMENT 3: Boost Control Characteristics Curve

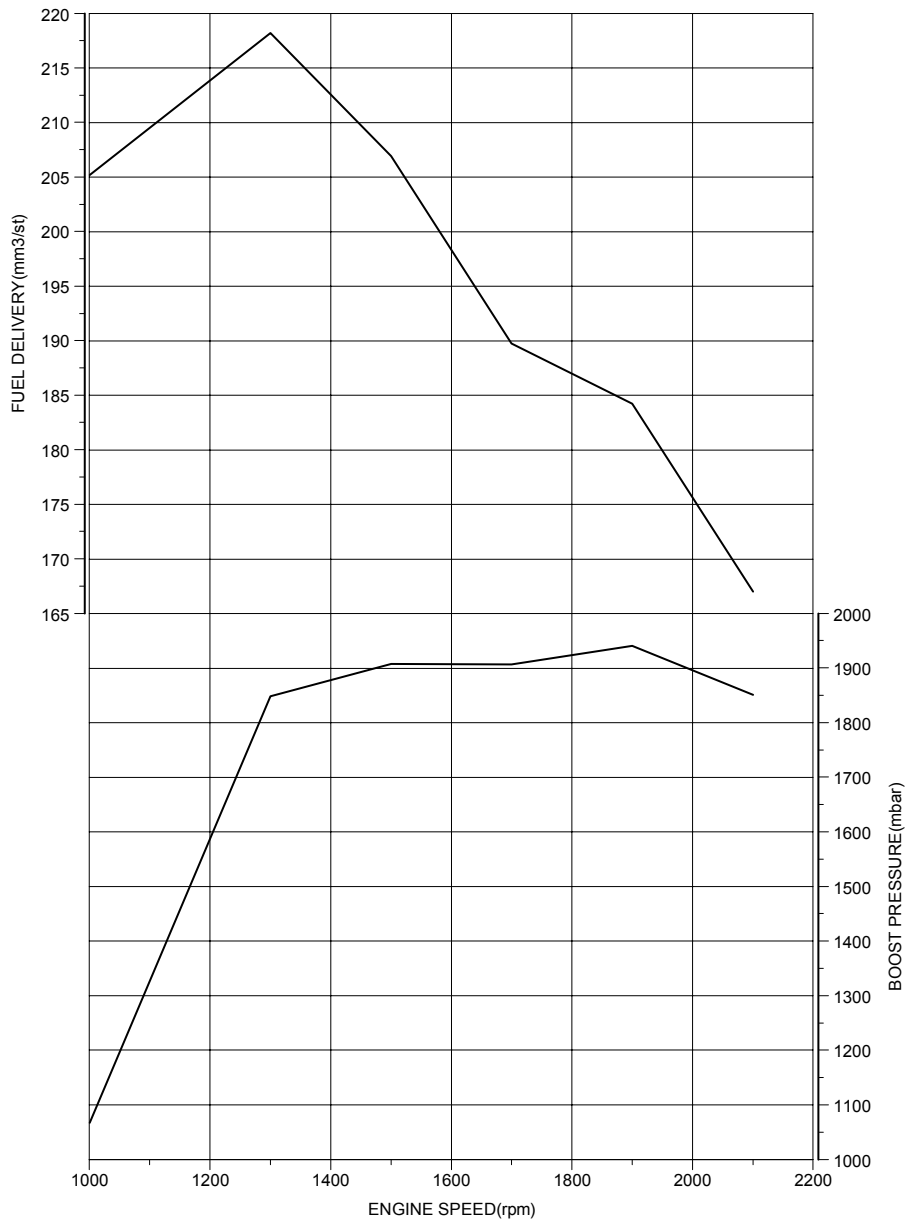






=


**ANNEX 1: ATTACHMENTS**

**ATTACHMENT 4: Declared Engine Performance**

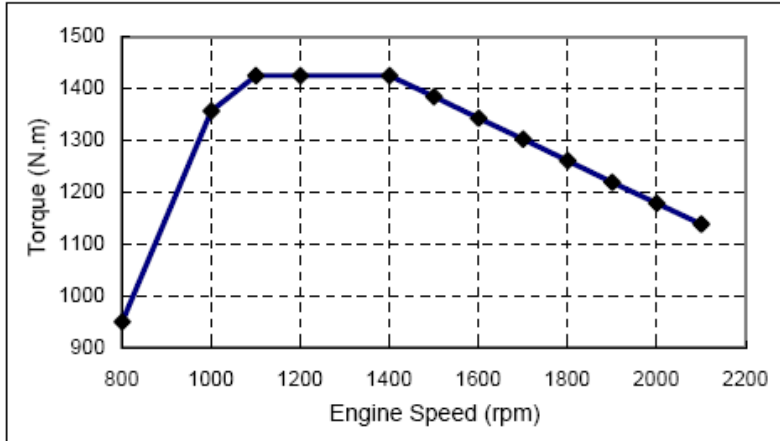

**Torque**

rpm	N.m
800	950
1000	1356
1100	1425
1200	1425
1400	1425
1500	1384
1600	1342
1700	1302
1800	1261
1900	1219
2000	1178
2100	1138

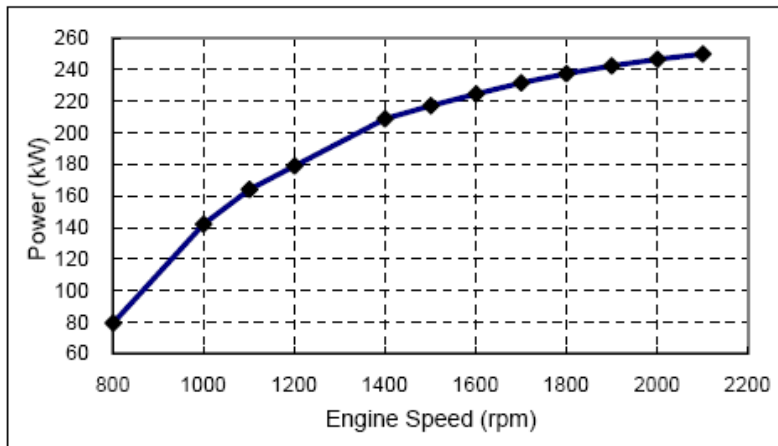

**Power**

rpm	kW
800	80
1000	142
1100	164
1200	179
1400	209
1500	217
1600	225
1700	232
1800	238
1900	243
2000	247
2100	250






Dongfeng Cummins Engine  
Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

## ANNEX 1: ATTACHMENTS

### ATTACHMENT 5: Picture/Drawing of Engine

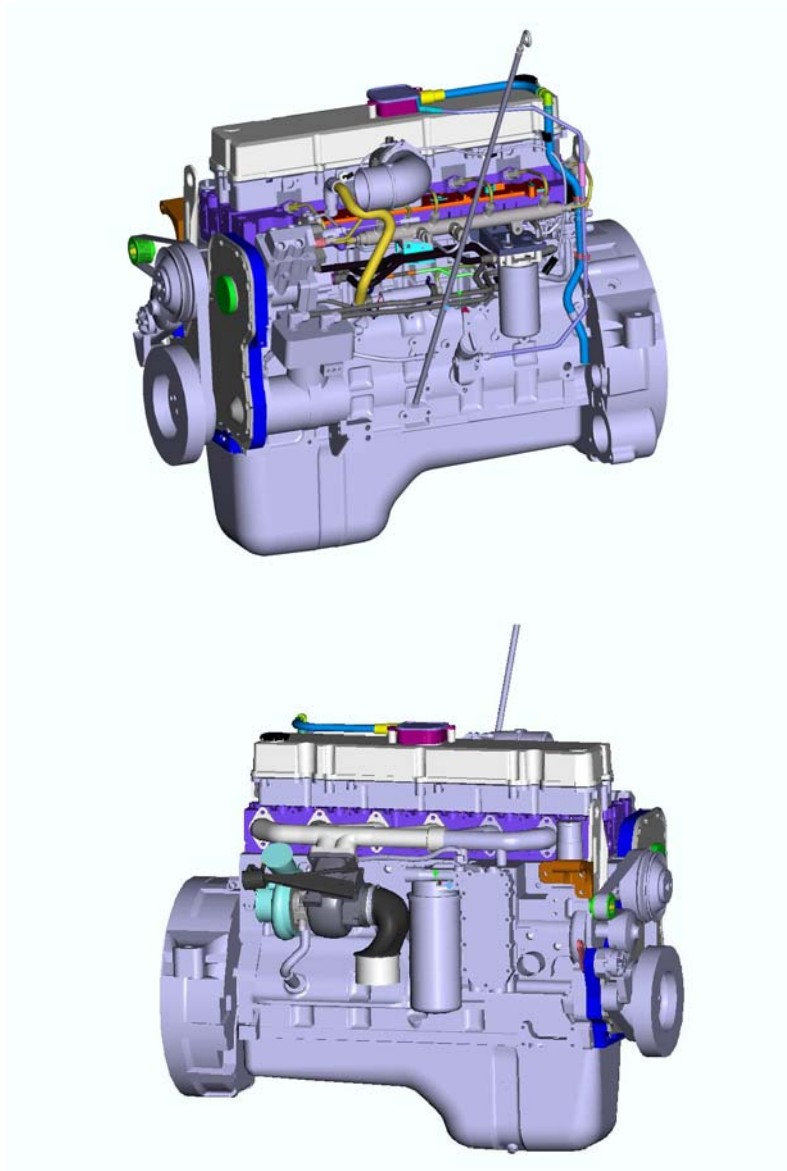


## ANNEX 1 - ATTACHMENTS





**ATTACHMENT 6: Fan Power Absorption**

**Viscous hub (maximum slip) plus hydraulic fan drive**

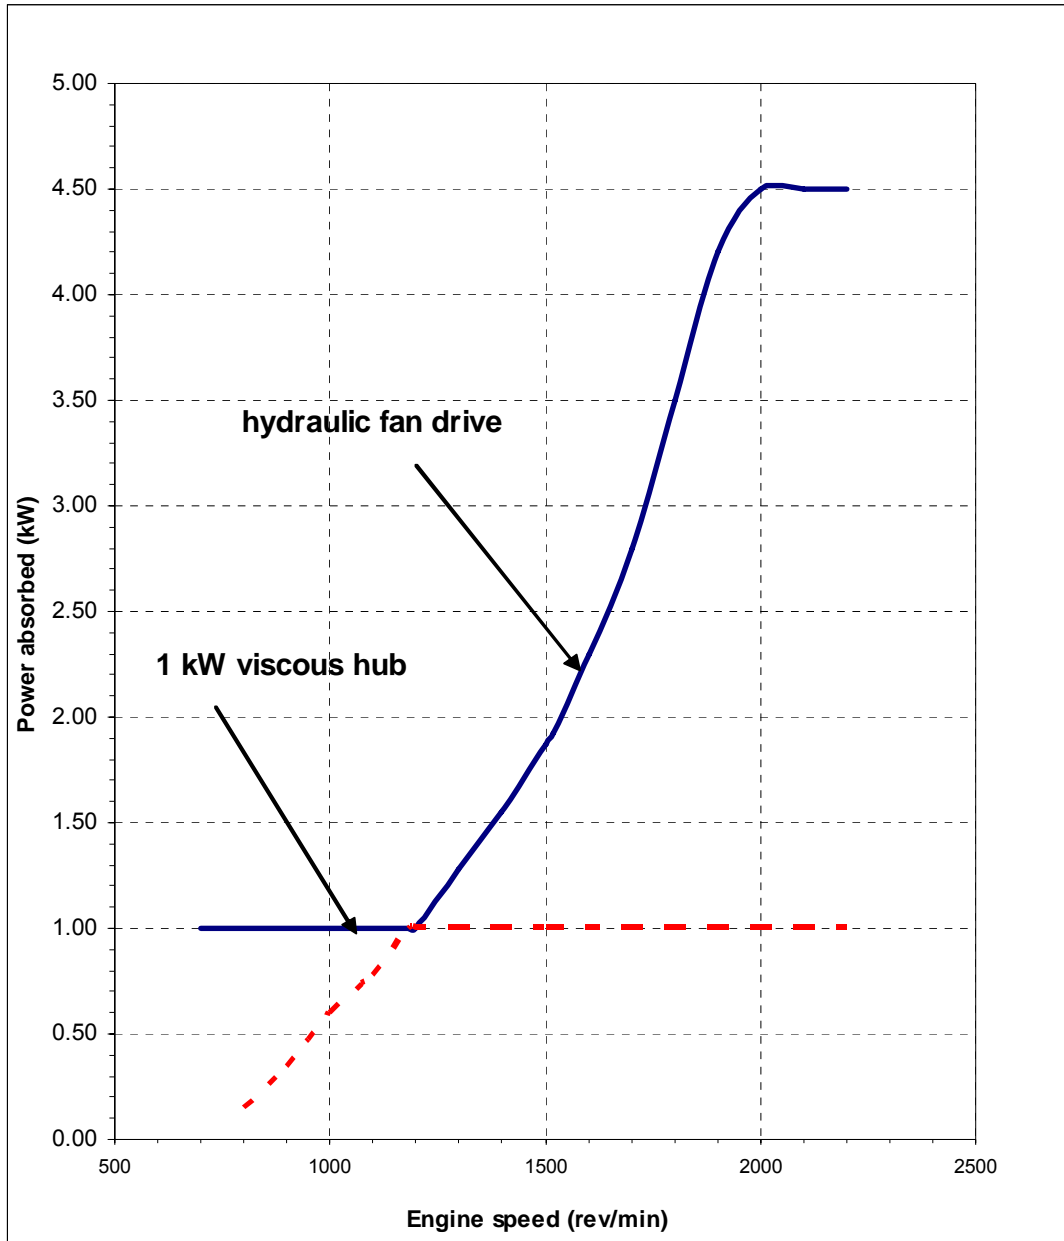




Dongfeng Cummins Engine  
Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

**ANNEX 1 - ATTACHMENTS**

**ATTACHMENT 7: Alternator Power Absorbed**

**CAV AC203 – drive ratio 3.0:1**

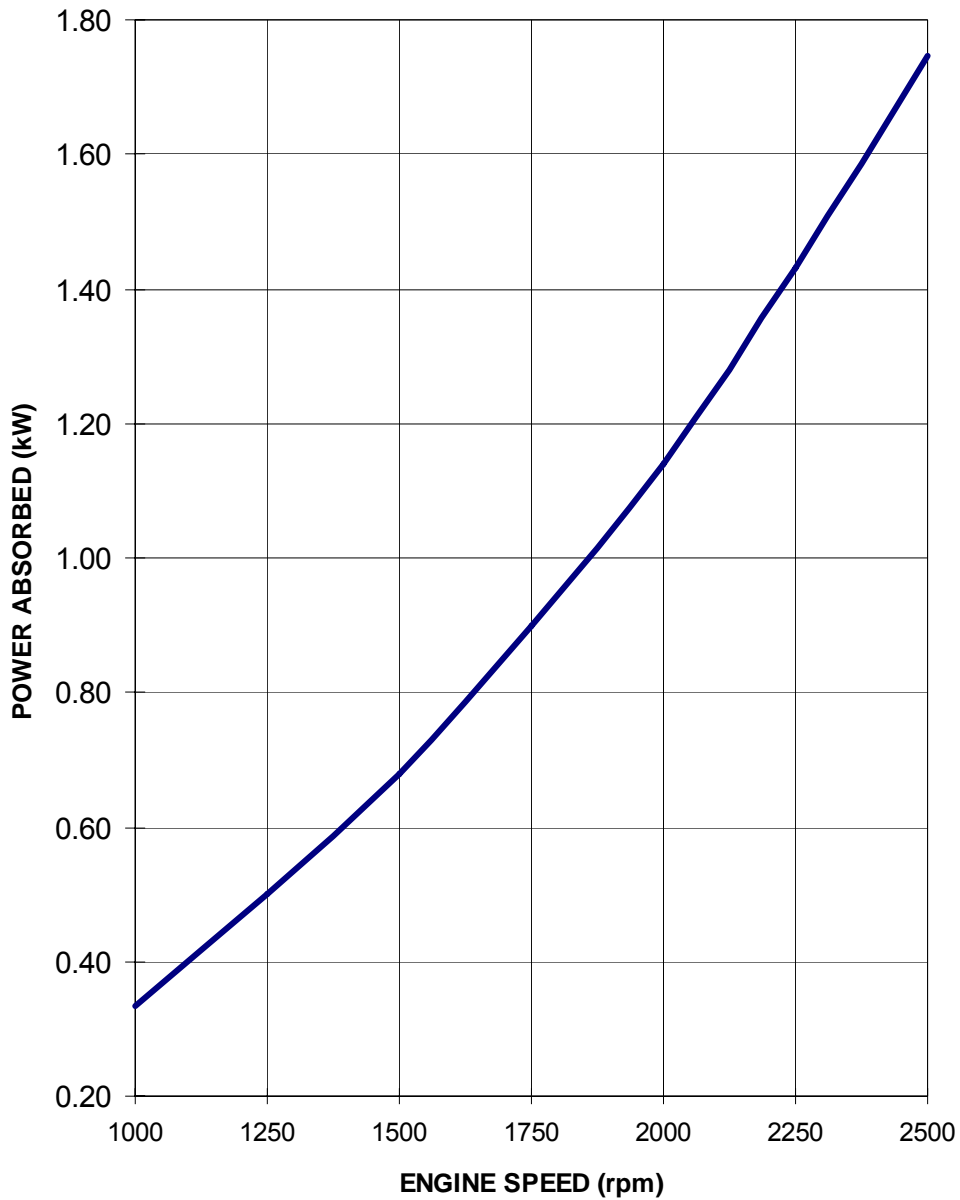




Dongfeng Cummins Engine  
Company, Ltd.

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

### ANNEX 1: ATTACHMENTS

#### ATTACHMENT 8: Air Intake System

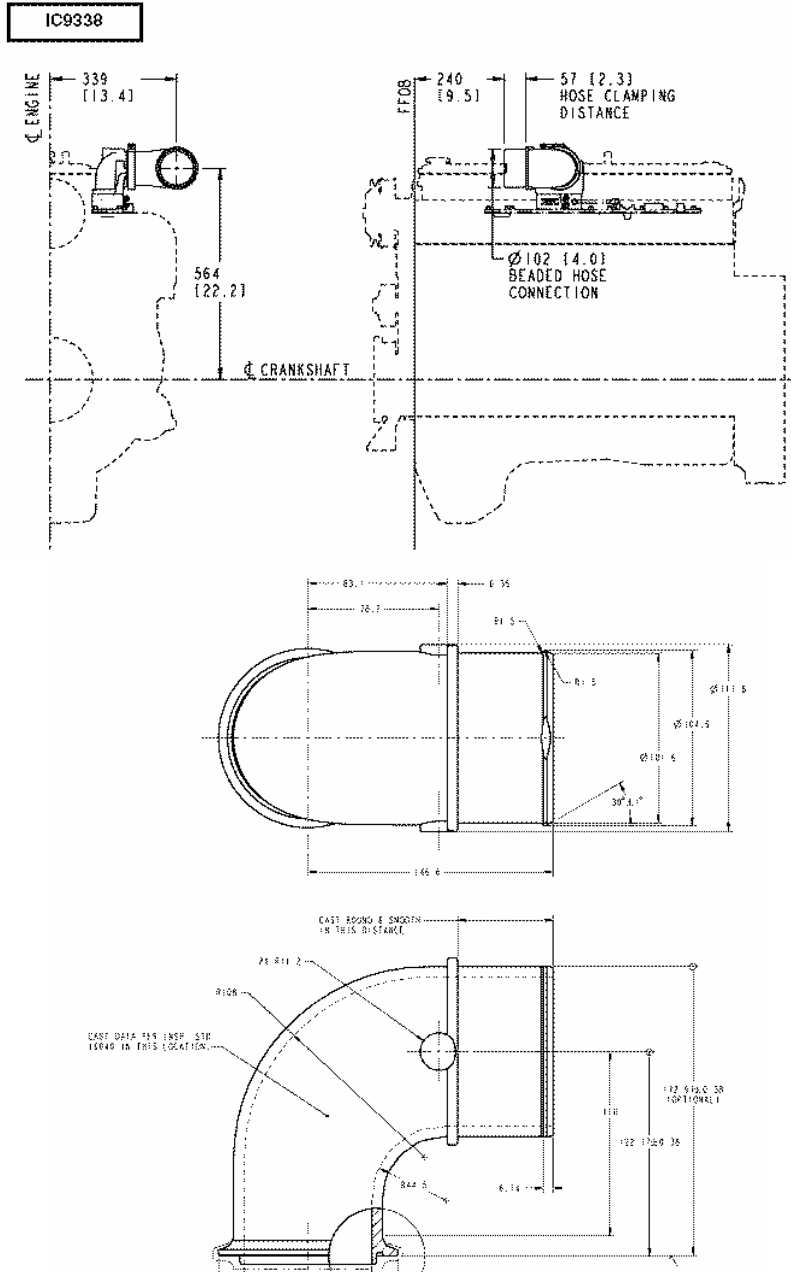





**Dongfeng Cummins Engine  
Company, Ltd.**

Engine Model:  
**ISLe340 30**  
Job Number: CSH184915

**ANNEX 1: ATTACHMENTS**

**ATTACHMENT 9: E-Mark**

 <p><b>Dongfeng Cummins Engine CO.,Ltd</b> Xiangfan,Hubei,China</p>	 <table border="1" data-bbox="970 510 1249 600"> <tr> <td>24xx</td> <td>XXXXXX</td> </tr> <tr> <td></td> <td></td> </tr> </table>	24xx	XXXXXX		
24xx	XXXXXX				
<p>Displacement.....x.x Litres Gross Power.....xxx kW @xxxrpm Valve lash - [cold] Int .xxxmm,Exh .xxxmm Low idle speed.....xxx-xxxrpm</p>	<p>WARNING: INJURY MAY RESULT AND WARRANTY IS VOIDED IF FUEL RATE RPM OR ALTITUDES EXCEED PUBLISHED MAXIMUM VALUES FOR THIS MODEL AND APPLICATION.</p>				
<p>Engine Serial No.....xxxxxxxxx Date of Mfg.....xx/xx/xx Customer Spec.....xxxxxxxxx</p>	<p>xxxxxxxxx</p>				




**TEST REPORT:**    **Engine Power – Positive ignition**  
**Engine Power and smoke – Compression ignition**

**Report/Job Number: CSH184915**

**Page: 1 of 6**

<b>TEST DETAILS</b>	
Subject	Engine smoke
EC Directive	/
ECE Regulation	Regulation 24.03
Location of Test	STATE AUTOMOTIVE QUALITY SUPERVISING AND TESTING CENTRE (XIANG FAN)
Date of Test	16 OCTOBER 2007
VCA Representative	Mr. Shenzhongjie
Manufacturer's Representative	Mrs. Huzhongping
Reason for Test	New Approval

<b>MANUFACTURER DETAILS</b>	
Manufacturer's Name	Dongfeng Cummins Engine Company, Ltd.
Manufacturer's Address	Automobile Industry Development Zone, Xiangfan, HuBei Province, Republic of China 441004
Model Type & description	ISLe340 30
Category	

<b>CONCLUSION</b>
The above mentioned engine was tested in accordance with the above Directives and Regulations and was found to comply in all respects.
 Signature: _____ Name: Shen.zhongjie Position: Test Engineer Date: 27 December 2007

<b>LIST OF ANNEXES</b>		
<b>ANNEX</b>	<b>No of PAGES</b>	<b>SUBJECT</b>
1		RISK ASSESSMENT CONTROL MEASURES CHECKLIST
2	3	Engine power raw data, calculations and results
3	1	Steady state smoke results (As applicable)
4	1	Free acceleration smoke results (As applicable)
5	1	Graph of net power and net torque versus engine speed
6	-	

Para (R24)	Parameter	Complies
------------	-----------	----------

Engine checking:

Part Identifiers		
Engine type:	ISLe340 30	
Engine Serial #:	P/N: 4943137 S/N: 2187 E/C: AX90021-02 GOV SC	ESN: DF50155986 D/C: 2007-04-04
Pump	Maker: Cummins Type: CCR1600	
Turbo Charger:	Maker: Holset Type: HX40W	
ECU:	Hardware : CM2150/CONTINENTAL; Software : 4942584 Cummins	
Rail Bar and Pump	Maker: BOSCH TYPE : 04-07-09 0445226025	000916 L2 3963815

**Engine details**

	Engine corresponds to that agreed in job content meeting		<b>Complies</b>
	Check of manufacturer's documentation		<b>Complies</b>
Ann4, 3.1.1	Total running hours prior to test:	>40 <b>at least more than 100Hours</b>	<b>Complies</b>
Ann10, Table 1	Standard intake system fitted	<del>Yes</del> / <b>No simulation</b>	<b>Complies</b>
Ann10, Table 1	Standard exhaust system fitted	<del>Yes</del> / <b>No simulation</b>	<b>Complies</b>
Ann4, 3.3.1	Air intake temperature measurement within 0.15 m upstream of the point of entry to the air cleaner, or if no air cleaner is used, within 0.15 m of the air inlet horn		<b>Complies</b>
Ann10, 5.1, Table 1, note 1b	Exhaust back pressure measurement within a point 150 mm downstream from the termination of the part of the exhaust system mounted on the engine.		<b>Complies</b>
Ann10, Table II	All engine setting are in accordance with manufacturer's		<b>Complies</b>



<i>Para (R24)</i>	<i>Parameter</i>	<i>Complies</i>
	specifications:	
Ann10, 5.1.1	Permitted auxiliaries (worst case) <b>not</b> fitted: 1) Fan 2) Generator	<b>Complies</b> Model: no known Model: no known
Ann10, 5.1.1	Permitted auxiliaries fitted: 1) / 2) /	<b>N/A</b> Model: / Model: /
Ann10, 5.1.2	Other auxiliaries fitted: 1) / 2) /	<b>N/A</b> Model: / Model: /
	Power absorbed details available for auxiliaries	
	<b>Test Equipment Details</b>	
	Site:	<b>Xiang Fan Test Centre Engine cell Lab.</b>
Ann10, 1.3	Dynamometer make: Model: Type: Calibration date: Due date	<b>AVL APA404/E/2801 13 January 2008</b>
Ann2, 12.	Opacimeter make (if applicable) Type: Calibration date: Due date	<b>AVL AVL 439 13 January 2008</b>
Ann10, 4.2	Tachometer:	<b>AVL</b>
Ann10, 4.4, 4.5	Temperature gauges:	<b>AVL</b>
Ann10, 4.7, 4.8	Pressure gauges:	<b>TYP8863 AVL</b>
Ann10, 4.6	Barometer:	<b>TYP8863 AVL</b>
Ann10, 4.3	Fuel measuring device: Type:	<b>AVL /</b>
7.3	Exhaust volume:	<b>Test cell system</b>

All test equipment correctly positioned:



Para (R24)	Parameter	Complies
------------	-----------	----------

**Determination of test speeds (compression ignition engines)**

Note: Combine compulsory test speeds for R24.03 and 72/306, and include additional speeds (eg  $\pm 50$ rpm) around maximum power and maximum torque to confirm peaks.

**72/306**

Highest test speed (Maximum Power):

N/A

Lowest test speed:

N/A

(Lowest test speed = higher of 1000rpm or 45% of max. power engine rpm)

(Highest test speed - Lowest test speed) / 5

N/A

NB 72/306 requires 6 speeds spaced equally between max power and min. rated.

Ann10, 5.4

**R24.03**

Highest test speed (Governed):

2100 rpm

Lowest test speed:

1000 rpm

Peak torque speed:

1300 rpm

NB: R24 requires the following speeds: governed, min. rated, peak power and peak torque.

Idle speed :

700 rpm

Engine run out speed :

2130 rpm

**Atmospheric Conditions:**

**Compression ignition**

Ann4, 3.3.2

Factors F and fa between 1.02 and 0.98 at start and during test

Ann10, 6.4.2.3


Correction factor  $\alpha_d$  between 0.9 and 1.1 during test

**Positive ignition**

Correction factor  $\alpha_a$  between 0.93 and 1.07 during test

<i>Para (R24)</i>	<i>Parameter</i>	<i>Complies</i>
	<b>Engine settings:</b>	
Ann10, Table1, note 1b	Exhaust back pressure within $\pm 1$ kPa of manufacturer's declared value	<b>Complies</b>
Ann10, Table1, note 1a	Intake pressure within 100Pa of manufacturer's declared value	<b>Complies</b>
	Temperature at inter-cooler outlet within manufacturer's specification	<b>Complies</b>
	Water and oil at manufacturer's declared normal operating temperatures	<b>Complies</b>
	<b>Net power results</b>	<b>see Annex I</b>
	The results in Annex I comply with requirements for measurement of net power as per:	
	ECE Regulation 85	N/A
	ECE Regulation 24.03 (Annex 10)	<b>Complies</b>
	Directive 80/1269/EEC as last amended	N/A
	Declared Net Power: 243 kW @ 2100rpm	
	Declared Net Torque: 1415 Nm @ 1300rpm	
	The declared net power is within the tolerance of measured power given in:	<b>Complies</b>
	ECE Regulation 85 ( $\pm 2\%$ @ Max power, $\pm 4\%$ @ other points )	N/A
	ECE Regulation 24.03 Annex 10 ( $\pm 2\%$ @ Max Power, -2%, +6% @ other points)	<b>Complies</b>
	Directive 80/1269/EEC as last amended ( $\pm 2\%$ @ Max power, $\pm 4\%$ @ other points)	N/A

<i>Para (R24)</i>	<i>Parameter</i>	<i>Complies</i>
	<b>Steady state smoke results – (If applicable)</b>	<b>see Annex II</b>
	<b>Free Acceleration Smoke Test – (If applicable)</b>	<b>see Annex III</b>
	Are all engine operation parameters correct and stabilised?	<b>Y</b>
Ann8, 3.8	Is the smoke tube pressure at idle and max rpm within 40 - 65 mm H <sub>2</sub> O?	<b>Complies</b>
Ann8,3.9	Did the smoke tube temperature remain between 70 - 140 °C during test?	<b>Complies</b>
Ann5, 1.3	Are F and fa between 1.02 and 0.98?	<b>Complies</b>
6.3.7	Are the values of XM less than A? (turbo-charged engines only)	<b>Complies</b>
	The results in Annex II & III comply with the measurement of visible pollutants at steady speed and under free acceleration as per:	<b>Complies</b>
	ECE Regulation 24.03 Directive 72/306/EEC as last amended	<b>Complies</b> N/A



(Note the data here is a summary of that required for R24, R85, 80/1269 and may exceed that required for a single approval)

<b>Job number</b>		<input type="text" value="CSH184915"/>
<b>Date of test</b>		<input type="text" value="17-Oct-07"/>
<b>Engine is</b>		<input type="text" value="water cooled"/> ▼
<b>Fuel consumption measured</b>		<input type="text" value="gravimetrically"/> ▼
<b>Chassis dynamometer</b>	<b>Make</b>	<input type="text" value="AVL"/>
	<b>Model</b>	<input type="text" value="APA404/E/2801"/>
	<b>Type</b>	<input type="text"/>
<b>Opacimeter</b>	<b>Make</b>	<input type="text" value="AVL"/>
	<b>Type</b>	<input type="text" value="AVL 439"/>
<b>Engine idle speed</b>		<input type="text" value="700"/> rpm
<b>Oil temp point of measurement</b>		<input type="text"/>
<b>Fuel state</b>		<input type="text" value="liquid"/> ▼

Depending on fuel type enter information in the boxes below

**Compression ignition - liquid fuel**

<b>Make</b>	<input type="text" value="Fangyuan"/>
<b>Specification</b>	<input type="text" value="diesel fuel"/>
<b>Cetane number</b>	<input type="text" value="53.2"/>
<b>Cetane Index</b>	<input type="text" value="50.1"/>
<b>sulfur</b>	<input type="text" value="50 ppm"/>
<b>spec density</b>	<input type="text" value="0.837"/> g/cm <sup>3</sup> at 288 K
<b>LCV</b>	<input type="text" value="/"/> kJ/kg

**Compression ignition - gaseous fuel**

N/A

<b>Feed system</b>	<input type="text"/>
<b>Gas</b>	<input type="text"/>
<b>Specification</b>	<input type="text"/>
<b>Oil/gas proportion</b>	<input type="text"/>
<b>LCV</b>	<input type="text"/> kJ/kg

**Lubricant**



Make

Specication

SAE viscosity



Directives 72/306/EEC and 80/1269/EEC as amended, ECE Regulation 24.03, Annex 10 and ECE Regulation 85

ISLe340 30

Engine power and smoke (compression ignition)

Job/Report No: CSH184915

Engine: ISLe340 30 Declared fuel rate: 166.87 mm<sup>3</sup>/stroke  
 Cubic capacity: 8.849 Litres at: 2100 rpm  
 Number of cylinders: 6 Density: 0.837 kg/l@15°C  
 2 or 4 stroke: 4

Engine Speed	rpm	2100	1900	1700	1500	1300	1000													
Indicated torque	Nm	1.	1136	1216	1298	1400	1477	1385												
		2.																		
Indicated Power	kW		250	242	231	220	201	145												
Fuel consumption	kg/hr	1.	52	52	48	46	42	30												
		2.																		
Temperature at injection pump	°C		37	38	38	38	38	38												
Temperature at fuel measurement	°C		39	39	39	39	39	39												
Temperature of Coolant	°C		85	83	82	82	82	82												
Oil temperature @ Sump	°C		92	93	93	93	93	93												
Air Intake temperature	°C	1.	21	21	21	21	22	22												
		2.																		
Intake depression	kPa (X)		4	3	3	2	1	1												
Temperature after turbo-charger	°C		159	163	161	163	164	120												
Pressure after turbo-charger	bar		1.85	1.94	1.91	1.91	1.85	1.07												
	kPa (Y)*		185.04	193.99	190.69	190.72	184.82	106.68												
Temperature at intercooler outlet	°C		50.3	50.2	46.8	44.2	40.4	25.4												
Pressure at intercooler outlet	bar		1.7	1.8	1.8	1.8	1.8	1.0												
		kPa (Y)**		172.55	182.35	180.75	182.25	178.04	104.15											
Exhaust temperature	°C		467	510	505	529	542	602												
Exhaust pressure	mbar		116.0	113.0	101.0	89.0	85.0	72.0												
		kPa		11.6	11.3	10.1	8.9	8.5	7.2											
Barometric pressure(H:72/306)	mbar		973.4	973.3	973.3	973.3	973.2	973.3												
		kPa		97.34	97.33	97.33	97.33	97.32	97.33											
Humidity	%		45.5	47.6	47.7	46.5	45.2	45.6												
Vapour pressure	kPa		1.14	1.20	1.21	1.18	1.16	1.20												
Dry atmospheric (ps)	kPa		96.20	96.14	96.13	96.14	96.17	96.13												
Smoke unit	%		0.38625212	0.85631258	0.6856387	0.85631258	0.77101233	0.941539												



Directives 72/306/EEC and 80/1269/EEC as amended, ECE Regulation 24.03, Annex 10 and ECE Regulation 85

ISLe340 30

Diesel Power and Smoke, TURBOCHARGED

INTERCOOLED

Job/Report No: CSH184915

Engine Speed		2100	1900	1700	1500	1300	1000
A (99/ps) <sup>0.7</sup>	dry atmos	96.20	96.14	96.13	96.14	96.17	96.13
		1.0203	1.0207	1.0208	1.0207	1.0205	1.0208
B (T/298) <sup>1.5</sup>	A.I.T (K)	294.1	294.2	294.3	294.4	294.5	294.9
		0.9804	0.9809	0.9814	0.9819	0.9824	0.9844
fa = A x B		1.0003	1.0013	1.0019	1.0023	1.0026	1.0049
F (Valid 72/306 requires 0.98-1.02)		1.0107	1.0109	1.0111	1.0113	1.0115	1.0121
C mg/min		868000	866333	798333	768167	702000	507833
D Cycles/min		1050	950	850	750	650	500
E Swept Volume Litres		8.849	8.849	8.849	8.849	8.849	8.849
F q = C/DE		93.42	103.05	106.14	115.74	122.05	114.78
G Absolute Inlet Pressure, mb/kPa, (Baro -X)		93.6	94.3	94.8	95.3	96.3	96.3
H Absolute Outlet Pressure, mb/kPa, (Baro + Y)		269.9	279.7	278.1	279.6	275.4	201.5
I r = H/G (When naturally-aspirated, set 1)		2.88	2.96	2.93	2.93	2.86	2.09
J qc = q/r = F/I		32.41	34.76	36.20	39.46	42.69	54.88
fm = 0.036 qc - 1.14		0.30	0.30	0.30	0.30	0.40	0.84
α d = fa <sup>fm</sup>		1.0001	1.0004	1.0006	1.0007	1.0010	1.0041



Directives 72/306/EEC and 80/1269/EEC as amended, ECE Regulation 24.03, Annex 10 and ECE Regulation 85  
 Diesel Power and Smoke,

ISLe340 30

Job/Report No: CSH184915

Measurement																	
Engine speed, rpm	2100	1900	1700	1500	1300	1000	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
Specific fuel consumption (indicated) g/kWh	208.47	214.84	207.29	209.58	209.48	210.08	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
Corrected Power, kW	249.84	242.04	231.20	220.06	201.28	145.63	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
Corrected Torque, Nm	1136.1	1216.5	1298.7	1400.9	1478.5	1390.7	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
Power to be subtracted for other auxiliaries, kW	1.	6.00	5.20	3.90	2.70	1.50	1.30										
	2.																
	3.																
Power absorbed by fan, kW To be subtracted if fan not fitted																	
Net Power, kW	243.8	236.8	227.3	217.4	199.8	144.3	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
Net Torque, Nm	1108.8	1190.3	1276.8	1383.8	1467.5	1378.2	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
Corrected Specific Fuel Consumption (net) g/kWh	213.6	219.5	210.7	212.0	210.8	211.1	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!



Directives 72/306/EEC and 80/1269/EEC as amended, ECE Regulation 24.03, Annex 10 and ECE Regulation 85 Diesel Power and Smoke,

Report/Job No: 0

Operation No  
Paragraph (R24)

**Steady State Smoke Test Result**

ISLe340 30

	Test No	1	2	3	4	5	6
Ann4,2.2	Engine Speed, rpm	2100	1900	1700	1500	1300	1000
	Indicated Power, kW	249.82	241.94	231.07	219.91	201.07	145.04
	Exhaust Pipe back pressure, kPa	11.6	11.3	10.1	8.9	8.5	7.2
†	Smoke Valve pressure, mm H2O < 75	✓	✓	✓	✓	✓	✓
†	Smoke tube temp limit °C >70	✓	✓	✓	✓	✓	✓
†	Smoke Valve temp	✓	✓	✓	✓	✓	✓
	Fuel Consumption	#REF! Limit 166.87 ±4% mg/stroke @ 2100rpm					
	Air intake temp, °C	21.1	21.2	21.3	21.4	21.5	21.9
	Inlet depression, kPa	3.70	3.00	2.50	2.00	1.00	1.00
Ann4,4.1	Nominal gas flow, L/s	154.86	140.11	125.36	110.61	95.86	73.74
Ann7	Limit, m <sup>-1</sup>	1.206	1.270	1.343	1.421	1.528	1.734
Ann4,4.2	Opacity, %	0.39	0.86	0.69	0.86	0.77	0.94
	m <sup>-1</sup>	0.01	0.02	0.02	0.02	0.02	0.02
	difference	1.197	1.250	1.327	1.401	1.510	1.712
Ann5, 3.1	Result nearest limit (SM)	0.009	-----	-----	-----	-----	-----
	Corresponding limit (SL)	1.206	-----	-----	-----	-----	-----
	Hartridge units with cold start engaged	-----	-----	-----	-----	-----	-----

† Tick to show compliance



Directives 72/306/EEC and 80/1269/EEC as amended, ECE Regulation 24.03, Annex 10 and ECE Regulation 85  
 Diesel Power and Smoke, ISLe340 30

Report/Job No: CSH184915

Operation No  
 Paragraph (R24)

**Free Acceleration Smoke Test**

Ann5, 1.1.1 Water temperature: 85 °C Oil temperature: 92 °C  
 Ann10, 5.3.2 Intake air temperature: 21 °C  
 Ann4, 3.3 Barometric pressure (H): 730.11 mm Hg  
 Barometric pressure: 97.34 kPa Vp: 1.75 kPa ps: 95.6 kPa  
 Factor F = 1.0176 x 0.9933 = 1.0108  
 Ann4, 3.3.1.2 Factor fa = 1.0248 x 0.9799 = 1.0043

Test No	Inertia (1) =1.0 kgm <sup>2</sup>		Inertia (2) kgm <sup>2</sup>		Inertia (3) kgm <sup>2</sup>		Inertia (4) = kgm <sup>2</sup>	
	Opacity	XM m <sup>-1</sup>	Opacity	XM m <sup>-1</sup>	Opacity	XM m <sup>-1</sup>	Opacity	XM m <sup>-1</sup>
Ann5, 2.3								
Ann5, 2.5,2.6	1							
	2							
	3							
	4							
	5							
	6							
	7	13.15454						
	8	10.15372						
	9	9.805343						
	10	10.34668	0.27					

		Inertia (1)	Inertia (2)	Inertia (3)	Inertia (4)
Ann5, 2.6	FAS test result: (XM)	0.27			
Ann 5, 3	Result nearest to limit in steady speed te: (SM)	0.01			
	Corresponding limit: (SL)	1.206			
	Corrected result: (XL)				
	SL/SM = 133.952	133.952			
	X1L = SL/SM x XM =	35.83			
	X2L = XM + 0.5 =	0.77			
	Absorbed coefficient to be marked on Vehicle	0.77			

Highest absorption coefficient, steady speed test \_\_\_\_\_ 0.02 m<sup>-1</sup>  
 Corresponding limit + 0.5 (A) \_\_\_\_\_ 2.23 m<sup>-1</sup>

FAS test result (XM) I(1)= 0.27 m<sup>-1</sup>, I(2)= m<sup>-1</sup>  
 I(3)= m<sup>-1</sup>, I(4)= m<sup>-1</sup>

(For turbocharged engines XM must be less than A)



### Engine net power and torque

